CTE B-LIFT 20J AUTOMATIC

WORKING DIAGRAM

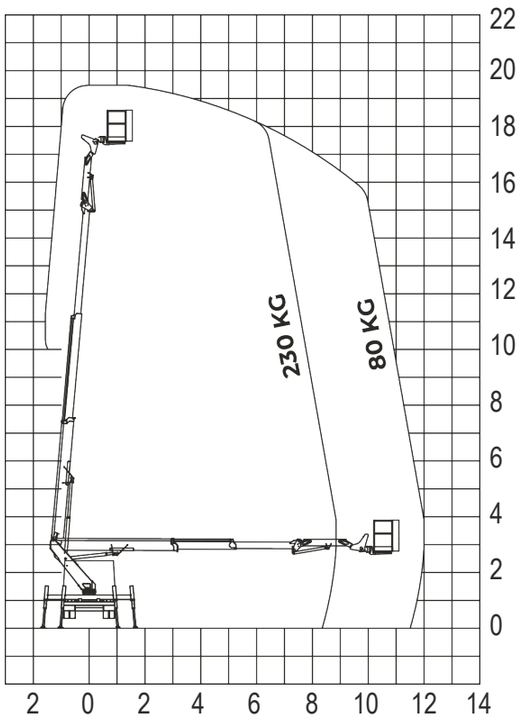

INFO

OUTRIGGERS
HE+H

WORKING HEIGHT
19,70 m

BASKET HEIGHT
17,70 m

MAX OUTREACH
12,00 m

BASKET LOAD CAPACITY
230 kg

BASKET SIZE
1400x700x1100 mm

BASKET ROTATION
90° + 90°

CONTROLS
Electric

TURRET ROTATION
700°

GVW
3,5 ton

STANDARD ACCESSORIES

The **AUTOMATIC** function is a new solution present in Aerial Working Platforms on Chassis.
It brings great advantages including increasing safety and facilitating the correct use of the necessary stabilization maneuver to start working.
With a single button, even from the basket, it allows to obtain stabilization in a safe, simple and fast way, quickly overcoming the irregularities of the ground.

DATA SHEET

- Cables and hoses installed inside the boom
- **AUTOMATIC closing**
- **AUTOMATIC stabilization from the basket and from the ground**
- Proportional electro-hydraulic controls with regulation of the speed of all movements
- Electronic safe system CAN BUS
- JIB
- 4 outrigger plates
- Socket 12V in the basket
- Possibility of simultaneous movements
- Automatic regulation of engine revolutions
- Cataphoresis treatment with powder coating
- Aerial part centering light on the basket

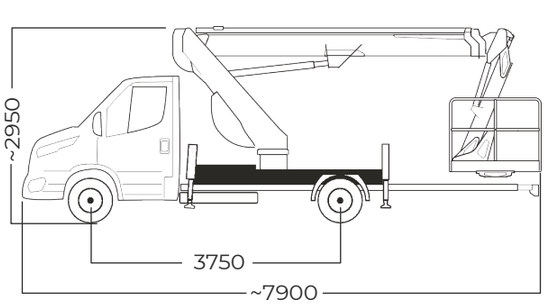

MAX STABILISATION





STABILIZZAZIONE MIN.

SAFETY DATA

- **Security System**
- Unintentional maneuver protection bar
- Controls protection of the basket
- Circuit braker with differential protection on the 230V line
- Safety bypass for operator rescue
- Moment limiting device with double security
- Self levelling system for the basket
- Inclinometer
- Flanged block valves
- Emergency button
- Emergency manual hand pump
- Possibility emergency remote rescue
- Automatic PTO deactivation
- Smart anti crash cab protection
- Digital hour-counter
- Cab light closed outriggers
- Maintenance light (Service)