

CTE

TRACCESS 270

↑ 27 m

→ 14 m

👤👤 250 kg

Reaching higher
performances in
the safest way with
S³ EVO.


The optimal mix of performance
and ease of use.

OCTE TRACCESS 270

Top of the range of TRACCESS family with impressive 27 m working height, 14 m of max outreach and 250 kg of nominal capacity in the entire working envelope.




Unrestricted working area



The most versatile stabiliser configuration



Doorway access



Different power sources available



Winch with 230 Kg lifting capacity



S³ EVO

TECHNICAL DATA

- » Articulated boom (two elements) + telescopic boom (main boom + 2 extension) + jib
- » Sigma boom articulation
- » Boom rotation $\pm 300^\circ$ non-continuous
- » Smooth proportional simultaneous controls with acceleration and deceleration ramps
- » Wireless remote controller with plug in for electrohydraulic controls in the basket and from the ground
- » Translation controlled by radio command and cable from the ground and from the basket
- » Graphic diagnostic display
- » Motor start and stop by radio control
- » Quick release aluminum basket with wheels (1300x700x1100)
- » 90° right + 90° left hydraulic basket rotation
- » Master-Slave basket leveling with manual level management from the basket and electronic un-leveling
- » Extendable width track
- » Dual drive speed
- » Load cell
- » 4 outriggers with sensor contacts and outrigger covers
- » Stabilization management with S3 EVO with 4 independent stabilizers
- » Home function
- » Smart ramps
- » Anticrush
- » Basket self-centering
- » Rise&drive jib functionality



watch the video

STRENX
PERFORMANCE STEEL

IPAF



WHEELED,
EASY-REMOVABLE BASKET



48 V BATTERY KIT
FOR HYBRID USE




EASIER SELF-LOADING
OPERATIONS




VALVE BLOCK
PROTECTION KIT




WORKING ENVELOPE

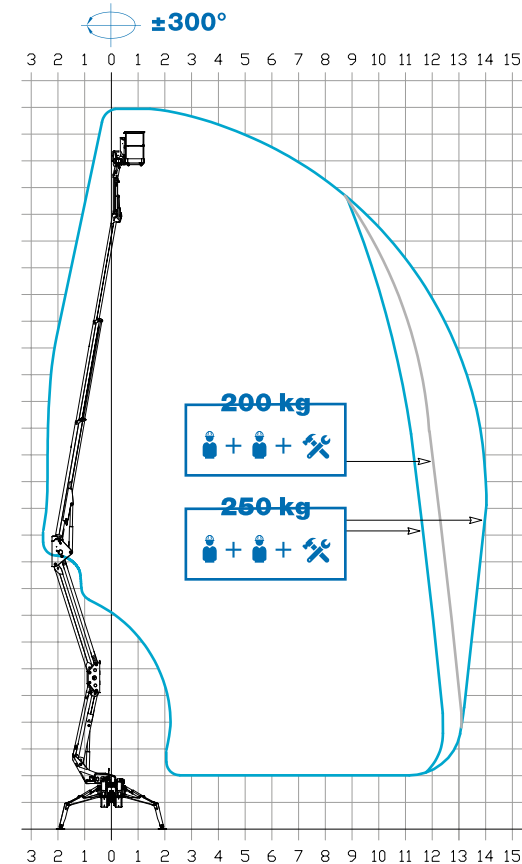

OUTRIGGER FOOTPRINT

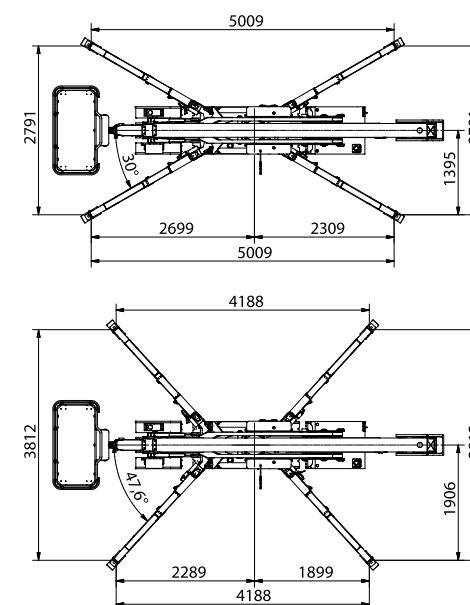

DIMENSIONS

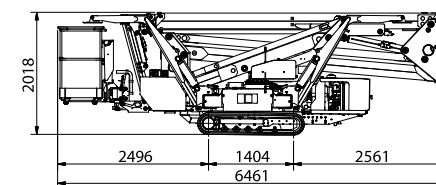

27* m

1,4 x 0,7 x 1,1 m

14* m

4.350 kg

250 kg

25* m

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

Product specifications are subject to change without notice or obligation.
Technical features and drawings in this brochure are for illustrative purposes only _TRACCESS 270 - ed. 05/21

OCTE TRACCESS 270



**We are CTE, one of the largest groups
in the personnel lifting and material
handling market.**



**After-sales
service**



**Spare parts
service**



**Scheduled
maintenance**



**Customer
Service**



**Authorized
Service**

Efficient services, innovative technical solutions, prompt assistance, professional advice and training: Work Becomes Easy is all this.

A style, a philosophy centred on customers, their safety and their quality of life. This is why CTE employs a team united by ideas, motivation and passion to simplify the work of companies operating in the field of lifting people and objects.

CTE S.p.A.

Headquarter
Via Caproni 7
38068 Rovereto (TN) IT
Ph. +39 0464 48.50.50

info@ctelift.com - www.ctelift.com

Factory

Loc. Terramatta 5
37010 Rivoli Veronese (VR) IT
Via E. Fermi 2
37010 Affi (VR) IT

CTE UK Ltd

Enderby Leicestershire - UK

CTE FRANCE Sas

Heillecourt - FR

CTE NA Corp

Willington - CT - USA

