

CTEZED 23.3 JHV on IVECO

↑ 23 m
→ 10 m
👤 250 kg

To achieve maximum performance in different types of applications.

Easy of use.
Control.
Technology.



CTEZED 23.3 JHV on IVECO

23 m working height, 10 m of outreach and an impressive capacity of 250 kg in the basket



S³ EVO



Stability at height



Impressive 300 kg basket capacity



Jib

TECHNICAL DATA

- » Double pantograph + telescopic boom with single extension + jib
- » Sigma boom movement enabled by connecting rods
- » $\pm 320^\circ$ turret rotation
- » Smooth proportional simultaneous controls with acceleration and deceleration ramps
- » Engine start and stop controls from basket and ground
- » Automatic engine rpm management on CTE ZED 23.3 JHV model
- » Anti-slip aluminium deck
- » Basket in aluminium 1400x700x1100 mm
- » $90^\circ + 90^\circ$ hydraulic basket rotation
- » Automatic hydraulically actioned basket levelling
- » 4 hydraulic outriggers with ground pressure sensors: front variable jacking outriggers and rear straight down stabilizers
- » Variable stabilisation managed by S³ EVO on CTE ZED 23.3 JHV model and H Stab System on CTE ZED 23.3 JH model
- » CAN BUS electronic management system
- » Ground control station with wired console
- » Load cell
- » Diagnostic display on board on CTE ZED 23.3 JHV model
- » Basket control station equipped with working envelope related info on CTE ZED 23.3 JHV model
- » Hydraulic system operated by vehicle's PTO
- » Buzzer indicating PTO engaged
- » Hour meter
- » 230 V AC in the basket
- » EN 280:2015 CE certified
- » Standard boom colours blue (RAL 5017) and white (RAL 9003)



watch the video

STRENX™
PERFORMANCE STEEL






EASY TO ACCESS BASKET



DIAGNOSTIC TOOLS




CTE CONNECT
SYSTEM INTEGRATED




EQUIPPED WITH JIB


OUTRIGGER FOOTPRINT

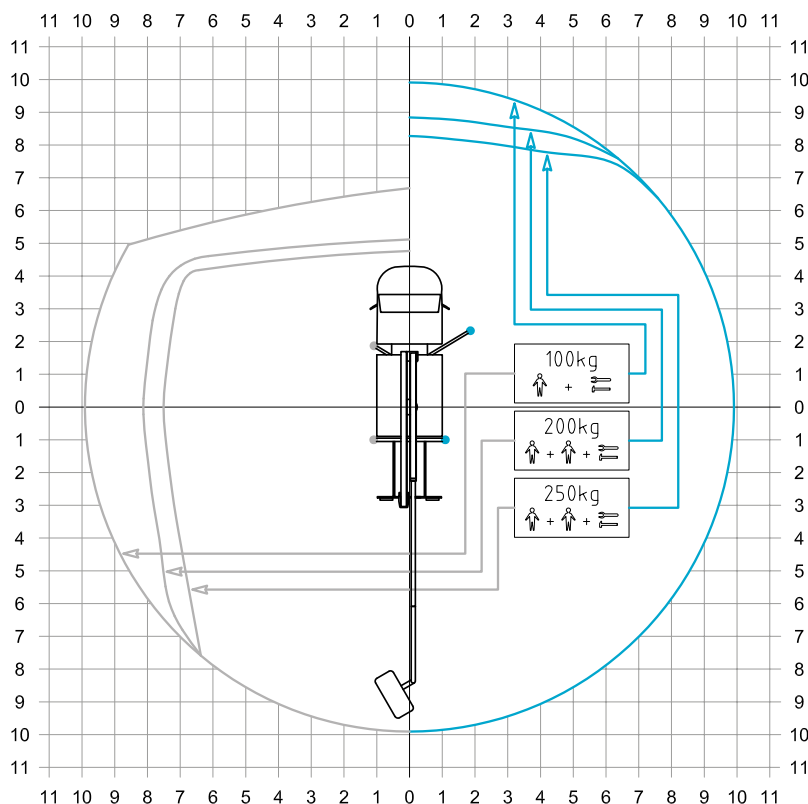

WORKING ENVELOPE

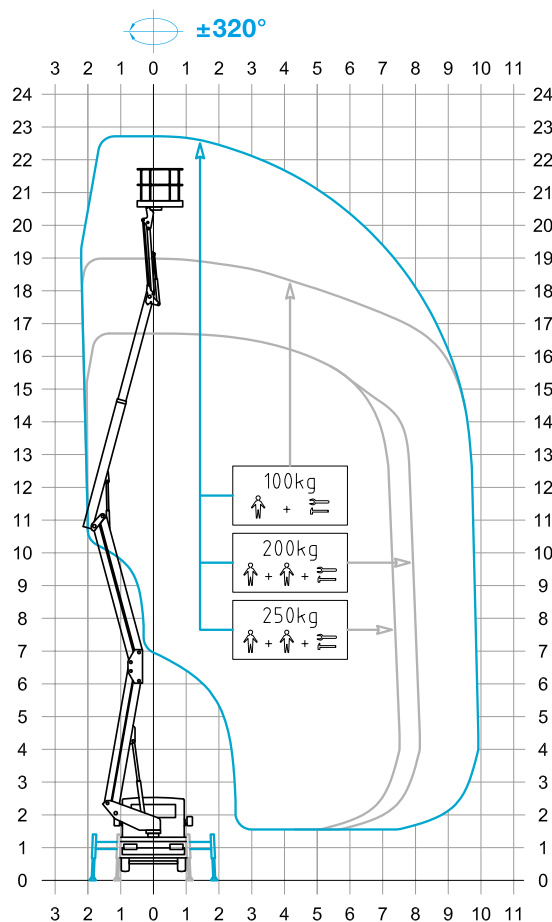

DIMENSIONS

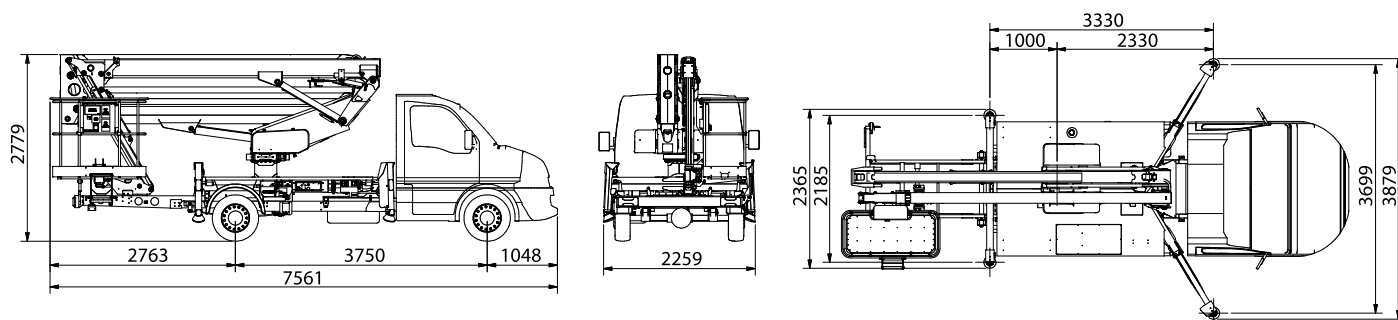

23* m

1,4 x 0,7 x 1,1 m

21* m

10* m

250 kg

GVW min 3.500 kg

VTR 200 kg

* outreach and height max values and repeatability can change within $\pm 3\%$ due to manufacturing variation and working condition.

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only _ZED 23.3 JHV - ed. 09/21

CTEZED 23.3 JHV on IVECO



**We are CTE, one of the largest groups
in the personnel lifting and material
handling market.**



**After-sales
service**



**Spare parts
service**



**Scheduled
maintenance**



**Customer
Service**



**Authorized
Service**

Efficient services, innovative technical solutions, prompt assistance, professional advice and training: Work Becomes Easy is all this.

A style, a philosophy centred on customers, their safety and their quality of life. This is why CTE employs a team united by ideas, motivation and passion to simplify the work of companies operating in the field of lifting people and objects.

CTE S.p.A.

Headquarter
Via Caproni 7
38068 Rovereto (TN) IT
Ph. +39 0464 48.50.50

info@ctelift.com - www.ctelift.com

Factory

Loc. Terramatta 5
37010 Rivoli Veronese (VR) IT
Via E. Fermi 2
37010 Affi (VR) IT

CTE UK Ltd

Enderby Leicestershire - UK

CTE FRANCE Sas

Heillecourt - FR

CTE NA Corp

Willington - CT - USA

